



# ENZIS INSTALLATION INSTRUCTIONS



## TRACK

### ART. NO.


140 006bz	bronze, 72"
140 006mc	matte chrome, 72"
140 012bz	bronze, 144"
140 012mc	matte chrome, 144"

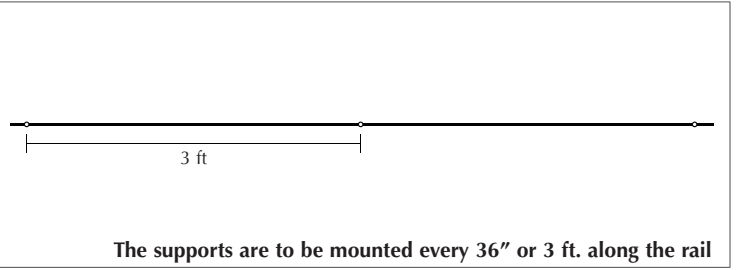

The supports are to be mounted every 36" or 3 ft. along the rail

## TECHNICAL DATA

<b>Description:</b>	The lightweight Enzis track is a single circuit track. Two aluminum rods in the flexible track hold the desired shape.
<b>Design:</b>	Jorg Westerheide
<b>Dimensions:</b>	length: 72" or 144"
<b>Material:</b>	PVC-braided UGA
<b>Supply voltage:</b>	12 V
<b>Current:</b>	max. 25 A / circuit
<b>Load:</b>	max. 300 W / circuit

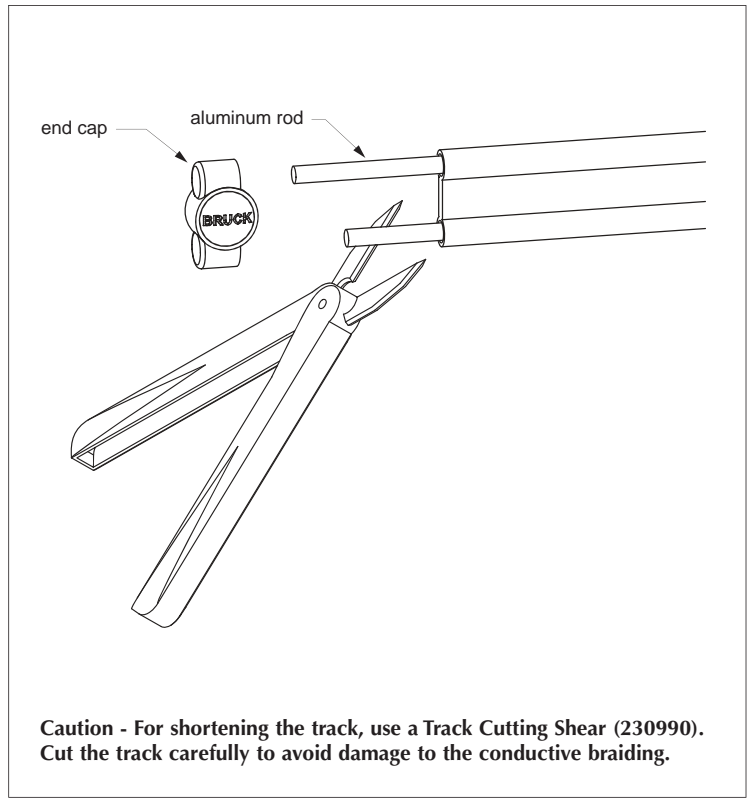

**Caution - For shortening the track, use a Track Cutting Shear (230990). Cut the track carefully to avoid damage to the conductive braiding.**

## IMPORTANT SAFETY INSTRUCTIONS



1. THIS PRODUCT MUST BE INSTALLED BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED, IN ACCORDANCE WITH LOCAL NEC CODE.
2. The Enzis rail system is not intended for use with a power supply cord or convenience receptacle adaptor. This rail system is to be supplied by Bruck Lighting.
3. Do not install this rail in damp or wet locations.
4. Do not install any part of a rail system less than 5 feet above the floor.
5. Do not install any fixture assembly closer than 6 inches from any curtain, or similar combustible material.
6. Disconnect electrical power before adding to or changing the configuration of the rail.
7. Do not attempt to energize anything other than lighting rail fixtures on the rail. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, and the like to the rail.
8. This track system MUST BE HARD WIRED. For all the wire connections, use Listed Wire Nuts.
9. Do not connect a rail to more than one circuit unless the rail is constructed so that it can be used with more than one circuit. Check with a qualified electrician. Although the rail lighting system may seem to operate acceptably, a dangerous overload of the neutral may occur and result in a risk of fire.
10. Secondary connections must be clean and tight to avoid arcing and overheating!
11. Warranty is void in case of unauthorized modifications and/ or improper use.

**SAVE THESE INSTRUCTIONS AND REFER TO THEM WHEN ADDITIONS TO OR CHANGES IN THE TRACK CONFIGURATION ARE MADE**

## CONTENTS OF DELIVERY

1 track complete with 2 endcaps

## USER MANUAL



**READ ALL OF THESE INSTALLATION INSTRUCTIONS BEFORE INSTALLING THE RAIL SYSTEM**

### PLANNING AID

- use planning grid to decide all mounting locations prior to installation.
- mark drill points on the ceiling.
- drill all holes and mount the ceiling supports.
- refer to the instructions included with the different types of ceiling supports, connectors, and other components for further details.

### SHORTENING OF THE TRACK

- For shortening the track, use a Track Cutting Shear (230990). Aluminum rods must be removed prior to cutting. Cut the track carefully to avoid damage to the conductive braiding.

### HINTS ON MAINTENANCE

For cleaning the system and its components:

- **switch off power to the system!** Let it cool down for 30 minutes.
- use a non-abrasive cleaning cloth to wipe track, components and fixtures.
- do not touch fixture lamps with bare hands! contaminants reduce the light output and service life.