





to download LEDRA IES files visit us at www.brucklighting.com

10° narrow beam


Total Input Watts = 3.5W at 120V
Spacing Criterion = 0.1
Luminous Diameter = 1.062



10° narrow beam



Candela Distribution

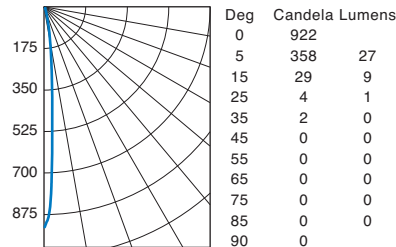

Zonal Lumen Summary


Zone	Lumens	%Fixt.
0-30	39	97.7
0-40	40	100.0
0-60	40	100.0
0-90	40	100.0
90-180	0	0.0
0-180	40	100.0

Average Luminance - candela/m²


Angle	Average
45	0
55	0
65	0
75	0
85	0

30° medium beam


Total Input Watts = 3.5W at 120V
Spacing Criterion = 0.3
Luminous Diameter = 1.062



30° medium beam

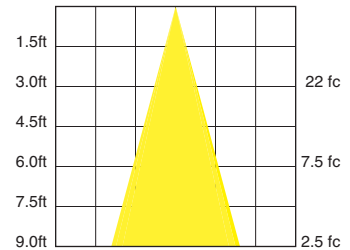

Candela Distribution

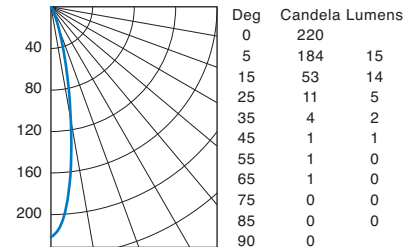

Zonal Lumen Summary

Zone	Lumens	%Fixt.
0-30	36	86.3
0-40	38	92.2
0-60	40	97.0
0-90	41	100.0
90-180	0	0.0
0-180	40	100.0

Average Luminance - candela/m²

Angle	Average
45	2471
55	3047
65	4135
75	0
85	0